

EQUIPMENT SERVICE INSTRUCTION

EVERPURE FILTRATION SYSTEM MAINTENANCE (ANNUAL)

For Restaurants with Everpure High Flow CSR 9300 and 9400 Series Filter Systems

NOTE: All Everpure cartridges are now being replaced with 3M cartridges.

Contact Strategic Equipment at (866)324-4253 Option #5

1. Turn water off to filtration unit (A,B &C). Open Bypass valves (D&E). Open Cartridge Flush valve (F). (See Figures 1&2)
2. Remove Pre-filter using sump wrench. Sanitize filter housing and filter bowl with green KAY-5 sanitizer. Lubricate and install new O-ring. Install new Pre-filter and hand tighten. (see Figure 3)
3. Remove SRX filter using sump wrench. Sanitize filter housing and filter bowl with green KAY-5 sanitizer. Lubricate and install new O-Ring. Install new 3M cartridge and hand tighten. (see Figure 4)
4. Remove each of the 4 carbon cartridges by turning $\frac{1}{4}$ turn left. Install the new CFS9112 cartridges by pressing up and turning $\frac{1}{4}$ turn right. Attach time strips and activate. (see Figure 5)
5. Open valve A slowly until fully open. Water will come out of valve F. Continue to flush through valve F for 4 full minutes. See if water is running clear. If not, keep flushing for another minute. When water from valve F is clear, shut valve F.
6. Open valves B&C. Close valves D&E. (see Figures 1&2)
7. If any leaks are detected at the Pre-filter bowl or the SRX feeder bowl, tighten slightly with the sump wrench.



Figure 1

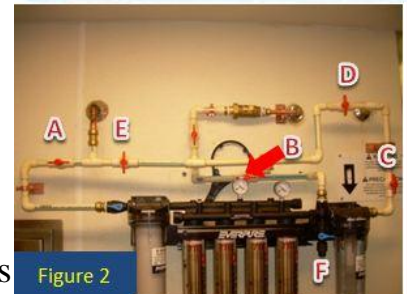


Figure 2



Figure 3



Figure 4



Figure 5

Your Everpure filtration system is now back in service with new cartridges.